



### Available models

#### R4 Access (Steel)

A	1 000 x 1 000	Max.	e	ML
	1 000 x 1 000	300 kg	100 g	●
	1 000 x 1 000	300 kg	20 g	×
	1 000 x 1 000	600 kg	200 g	●
	1 000 x 1 000	600 kg	50 g	×
B	1 500 x 1 500	Max.	e	ML
	1 500 x 1 500	600 kg	200 g	●
	1 500 x 1 500	600 kg	50 g	×
	1 500 x 1 500	1 500 kg	500 g	●
	1 500 x 1 500	1 500 kg	100 g	×
C	Special dimensions	Max.	e	ML
	800 x 800 ou 1 250 x 1 250	300 kg	100 g	●
	800 x 800 ou 1 250 x 1 250	300 kg	20 g	×
	800 x 800 ou 1 250 x 1 250	600 kg	200 g	●
	800 x 800 ou 1 250 x 1 250	600 kg	50 g	×
	800 x 800 ou 1 250 x 1 250	1 500 kg	500 g	●
	800 x 800 ou 1 250 x 1 250	1 500 kg	100 g	×

#### R4-Access (Stainless steel)

A	1 000 x 1 000	Max.	e	ML
	1 000 x 1 000	300 kg	100 g	●
	1 000 x 1 000	300 kg	20 g	×
	1 000 x 1 000	600 kg	200 g	●
	1 000 x 1 000	600 kg	50 g	×
B	1 500 x 1 500	Max.	e	ML
	1 500 x 1 500	600 kg	200 g	●
	1 500 x 1 500	600 kg	50 g	×
	1 500 x 1 500	1 500 kg	500 g	●
	1 500 x 1 500	1 500 kg	100 g	×
C	Special dimensions	Max.	e	ML
	800 x 800 ou 1 250 x 1 250	300 kg	100 g	●
	800 x 800 ou 1 250 x 1 250	300 kg	20 g	×
	800 x 800 ou 1 250 x 1 250	600 kg	200 g	●
	800 x 800 ou 1 250 x 1 250	600 kg	50 g	×
	800 x 800 ou 1 250 x 1 250	1 500 kg	500 g	●
	800 x 800 ou 1 250 x 1 250	1 500 kg	100 g	×

### Application

The R4 Access range platform scales are equipped with 4 shear beam load cells for reliability and optimum precision.

The R4 Access platform scales are available in several ranges from 300 to 1 500 kg\*, in two dimensions 1 000 x 1 000 mm and 1 500 x 1 500 mm\*\* and in two versions :

- R4 Access : steel structure equipped with nickel plated steel load cells (protection according to IP 67),
- R4-S Access : stainless steel structure and load cells (protection according to IP 67).

The R4 Access platform scales can be used with a large number of indicators in the PRECIA-MOLEN range for trade use applications up to 3 000 divisions or for non-trade use applications with 15 000 divisions.


### European Conformity

Compliant with the definition of a conventional load receptor in accordance with the guide WELMEC 2.4.

### Scope of supply

The R4 Access range platform scales are delivered with a 6 m\*\*\* cable for connection to the associated indicator.

### General presentation

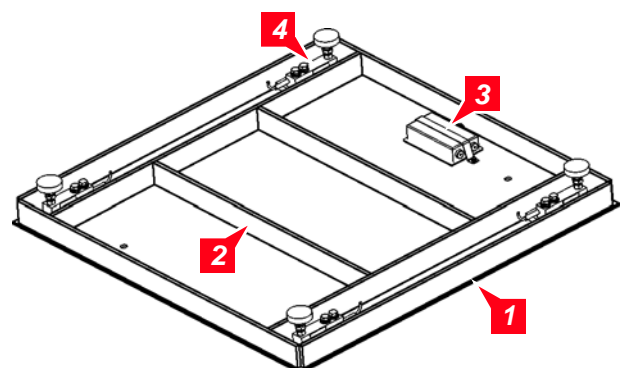

1. Steel or stainless steel platform (-S models).
2. Steel or stainless steel reinforcement structure (-S models).
3. Junction box.
4. Load cell with shock absorber and level adjusting feet.

\* 3 t option for the 1 500 x 1 500 mm model.

\*\* 800 x 800 mm and 1 250 x 1 250 mm model as option.

\*\*\* 5 m for an I 53 indicator.

Standard models

R4 Access - Steel

Model	Capacity (kg)	Trade Use (e) (g)	Non-Trade Use (d)					Height			Feet centers (mm)	Weight (kg)	Load Cell		Max. Tare (kg)	
			20 g	50 g	100 g	200 g	500 g	1 kg	min. (mm)	nom. (mm)			max. (mm)	Capacity (kg)		V min (g)
1 000 x 1 000 mm	300	100	●	●	●	×	×	×	84	88	92	850 x 850	82	500	50	NC
	600	200	×	●	●	●	×	×						1 000	100	
1 500 x 1 500 mm	600	200	×	●	●	●	×	×	85	93	92	1 350 x 1 350	177	1 000	100	NC
	1 500	500	×	×	●	×	●	×						1 000	100	

R4 Access - Stainless steel

Model	Capacity (kg)	Trade Use (e) (g)	Non-Trade Use (d)					Height			Feet centers (mm)	Weight (kg)	Load Cell		Max. Tare (kg)	
			20 g	50 g	100 g	200 g	500 g	1 kg	min. (mm)	nom. (mm)			max. (mm)	Capacity (kg)		V min (g)
1 000 x 1 000 mm	300	100	●	●	●	×	×	×	78	82	86	850 x 850	85	500	34	NC
	600	200	×	●	●	●	×	×						1 000	67	
1 500 x 1 500 mm	600	200	×	●	●	●	×	×	78	82	86	1 350 x 1 350	180	1 000	67	NC
	1 500	500	×	×	●	×	●	×						1 000	67	

Special models (tailor mode)

R4 Access - Steel

Model	Capacity (kg)	Trade Use (e) (g)	Non-Trade Use (d)					Height			Feet centers (mm)	Weight (kg)	Load Cell		Max. Tare (kg)	
			20 g	50 g	100 g	200 g	500 g	1 kg	min. (mm)	nom. (mm)			max. (mm)	Capacity (kg)		V min (g)
800 x 800 mm	300	100	●	●	●	×	×	×	84	88	92	650 x 650	62	500	50	NC
	600	200	×	●	●	●	×	×						1 000	100	
1 250 x 1 250 mm	600	200	×	●	●	●	×	×	85	93	92	1 100 x 1 100	138	1 000	100	NC
	1 500	500	×	×	●	×	●	×						1 000	100	
1 500 x 1 500 mm	3 000	1 000	×	×	×	●	×	●	85	93	92	1 350 x 1 350	195	2 000	200	NC


R4 Access - Stainless steel

Model	Capacity (kg)	Trade Use (e) (g)	Non-Trade Use (d)					Height			Feet centers (mm)	Weight (kg)	Load Cell		Max. Tare (kg)	
			20 g	50 g	100 g	200 g	500 g	1 kg	min. (mm)	nom. (mm)			max. (mm)	Capacity (kg)		V min (g)
800 x 800 mm	300	100	●	●	●	×	×	×	78	82	86	650 x 650	63	500	34	NC
	600	200	×	●	●	●	×	×						1 000	67	
1 250 x 1 250 mm	600	200	×	●	●	●	×	×	78	82	86	1 100 x 1 100	138	1 000	67	NC
	1 500	500	×	×	●	×	●	×						1 000	67	

WARNING : the mechanical strength of all models is equal to the maximum capacity.


Options & Accessories

Plates

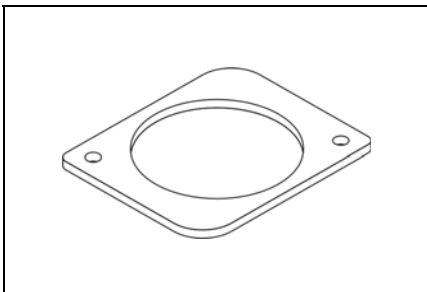


(i) Delivered unassembled.

Loading Ramp

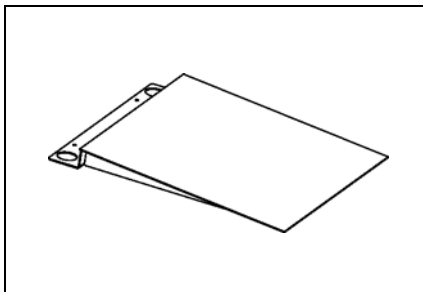

Pit frame<sup>(i)</sup>

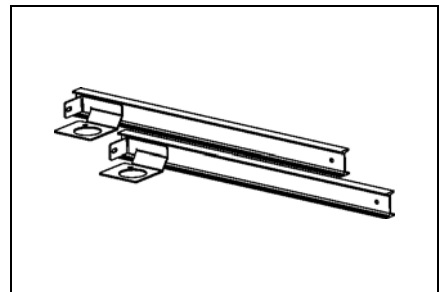

Your weighing specialist

Illustrations are not contractual. Precia-Molen reserves the right to modify at any time, without prior notice, the information contained in this leaflet.

Offices and Factory  
 P.O. Box 106 - F 07000 Privas - France  
 Tel. 33 (0) 475 664 600  
 Fax 33 (0) 475 658 330  
 E-MAIL webmaster@preciamolen.com  
 RCS : 386 620 165 RCS Aubenas

